

SPECIFICATIONS

Measurements

Frequency

200 kHz

Beam Angle

7°

Depth Resolution

0.1ft/0.01m

Accuracy

$\pm 1\text{cm} \pm 0.1\%D$ (0.1% of depth value)

Ping Rate

14Hz, Maximum 30Hz

Sound Velocity

1300-1700m/s, resolution is 1m/s

Depth Range

0.3-300m/900ft

Draft

0-9.9m

Gain Control

AGC and TVG, depth and gain, a double door tracking

Output data format

SOUTH, SDH-13D, DES025, INN455, ODOM etc

Physical

Environmental

-30°C ~ +60°C non-condensing

Output Power

Up to 300 watts

Power Supply

9-15V DC, less than 25w,

110~265V AC (optional),

Dimension

35cm × 29cm × 14cm

Weight

7.5kg

Hardware part

Embedded system index

CPU frequency 1.6GHz

Internal memory 1G

Memory capacity 4G high-speed CF card

(supports extended storage)

I/O interface

2 USB

2 RS232

1 VGA interface

Display Panel Layout

12.1-inch color LCD

Touch screen

Embedded windows XP OS

Power ON/OFF

Interface protection

Separate Panel Overlay for

Keyboard

Mouse

Remarks

Measurement accuracy and operation range might vary due to atmospheric conditions, signal multipath, obstructions, observation time, temperature, signal geometry and number of tracked satellites. Specifications subject to change without prior notice.



STANDARD CONFIGURATION

1. Echo Sounder SDE-28S	1pc
2. Carrying Case (for echo sounder)	1pc
3. 200KHz Transducer	1pc
4. Transducer Pole	1pc
5. Carrying Case for Transducer	1pc
6. Double RS-232 Communication Cable	1pc
7. 220V External Power Supply Cable	1pc
8. 220V External Power Supply Cable Adapter	1pc
9. 12V External Power Supply Transfer Cable	1pc
10. Keyboard (USB)	1pc
11. Mouse (USB)	1pc
12. Adapter Cable for Mouse & Keyboard	1pc
13. Pen Drive	1pc
14. SDE-28S Software	on board
15. PowerNav Software (with dongle key)	on board

Dealer info

KOLIDA
KOLIDA INSTRUMENT



SDE-28S

Single Frequency Digital Echo Sounder



KOLIDA
KOLIDA INSTRUMENT


GUANGDONG KOLIDA INSTRUMENT CO.,LTD.

Add: 2F, Surveying & Mapping Building (He Tian Building), NO 24-26, Tianhe Software Park,

Ke Yun Road, Guangzhou 510665, China

Tel: +86-20-85542075 Fax: +86-20-85542136


Email: export@kolidainstrument.com www.kolidainstrument.com

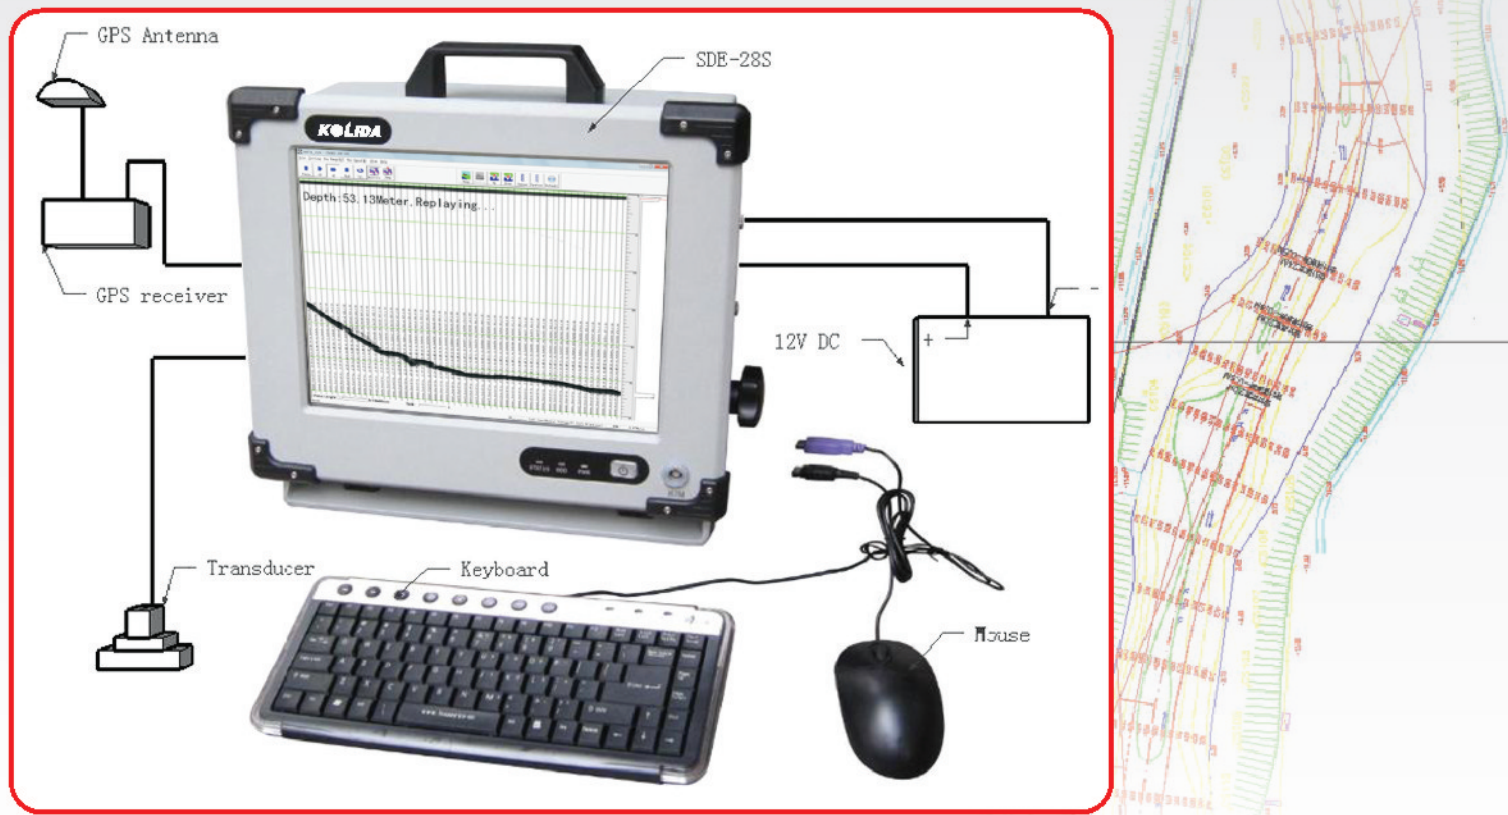

ONBOARD SOFTWARE


SDE-28S (for depth measurements)

- Real-time vivid display of graphic and data, easy approach to underwater waves
- Integrated sound velocity calculation for more accurate results
- Smart alarm for shallow water and "No echo" tracking to secure hydrographic operations
- Real-time display of the water depth value tracking lines, easy to be compared with underwater waves
- Automatic measurements and switch, intelligent operation, easy to use
- Optional output formats and convenient printing facilities

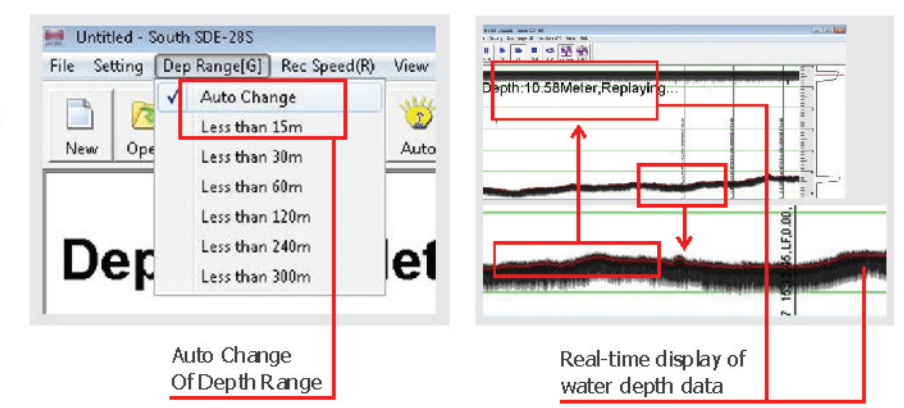


KEY FEATURES

- Embedded WindowsXP operating system, user-friendly interface
- Integrated with both computer and echo sounder at industrial level, yet low power consumption
- Full aluminum housing, compact and handy, particularly designed for less-than-ideal circumstances
- High-speed DSP chip processing technology to ensure reliable waveforms and depth values
- Supports NMEA-0183 communication to gain orientation information
- High compatibility, flexible to connect different GPS devices
- Built-in flash memory upgradeable to larger capacity for diverse demands
- 12.1-inch color LCD featuring a wide viewing angle and adjustable brightness
- Automatic storage of depth data up to 24 hours, supports replay

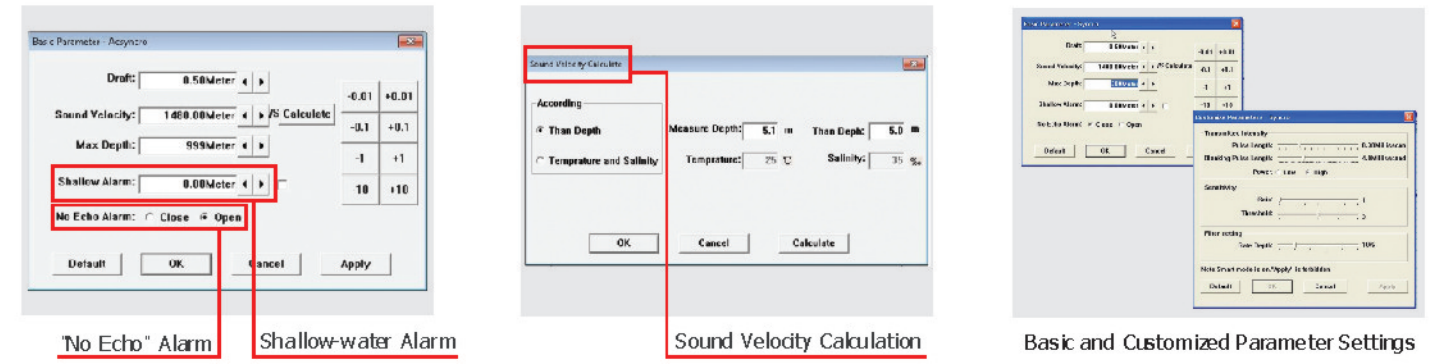


USER INTERFACES

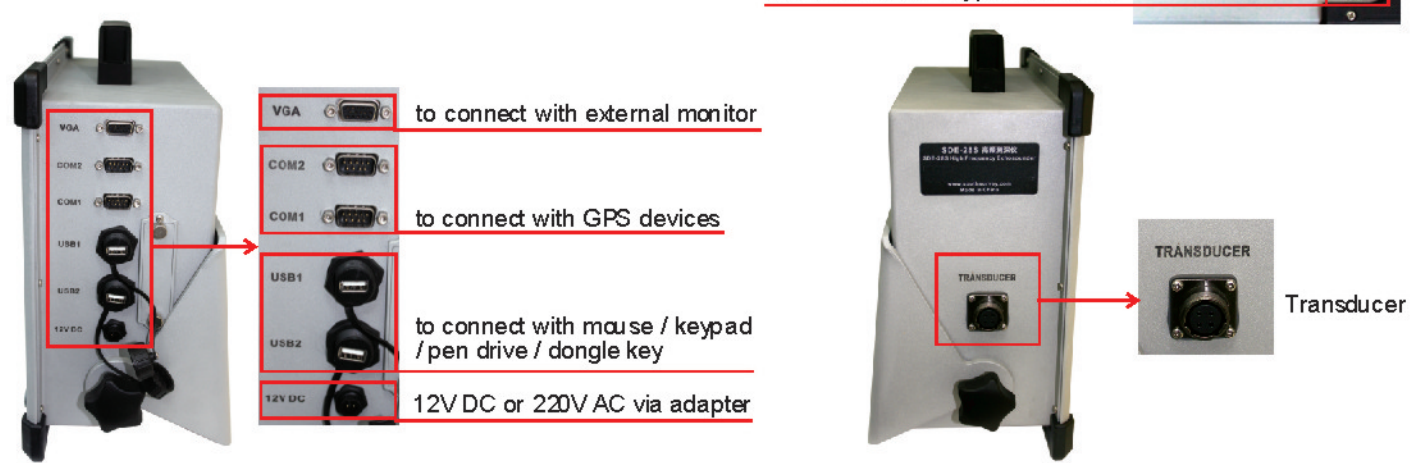

APPLICATIONS

- Coastland, fairway depth measurements
- Freshwater, lake, reservoir depth measurements
- Dredging engineering measurements
- Integrated automated depth measurement (navigation measurement software required)
- Positioning navigation terminal (compatible to all GPS models with NMEA-0183 data exported) for dredging engineering projects

- ### PowerNav (for navigation purpose)
- New software kernel, faster processing and more stable
 - Professional Engineering map sheet and data management, wizard-style parameter setting
 - High compatibility, flexible to import graphs and data, connectible to all GPS devices and echo sounders
 - Modular designed, meets diverse needs of hydrographic engineering projects
 - Direct graphical navigation window box, auto voice prompt for yaw
 - Intelligent scheme line model, available for fast drawing of waterway, Area, arc, etc.
 - Customized formats for data export edit, easy to export To all Mapping software

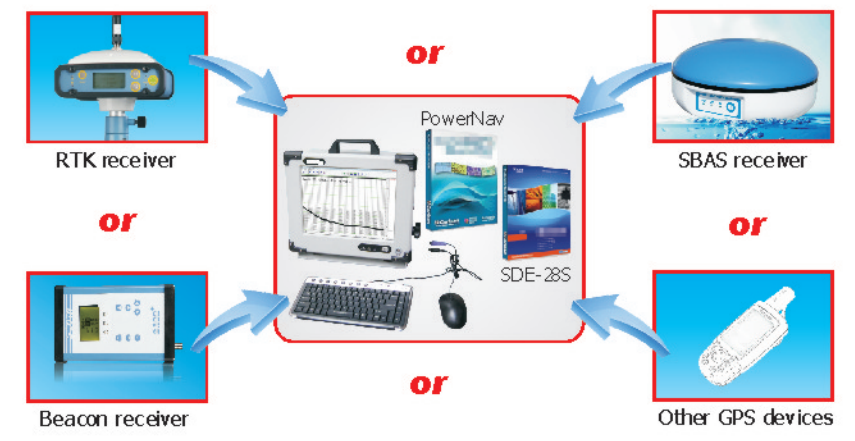

A Variety of Solutions for Different Hydrographic Projects
(Note: different accuracy levels result from working with different GPS receivers.)